

Video Wall

LG Electronics' ultra-slim 0.9mm **even bezel**

Display Color Variation by Visual Angle

Unlike normal panels where the screen appears distorted when outside the front eye level, the IPS panel maintains the same color and brightness from any angle, which allows accurate information to be delivered.

Special Features

Minimized disconnection between screens through algorithm adjustment



Guide Bracket




Classified In/Out Port

Provides a variety of options for ease of use and installation

In order to minimize errors when connecting Guide Bracket and Daisy Chain by improving smoothness during video wall installation, the ports are color-coded and printed to provide high-classified In/Out Port options for ease of use and installation.

Circuit protection coating to prevent external contamination

Circuit protection coatings provide excellent durability by securing circuit boards from dust, iron dust, moisture and other external environmental factors.

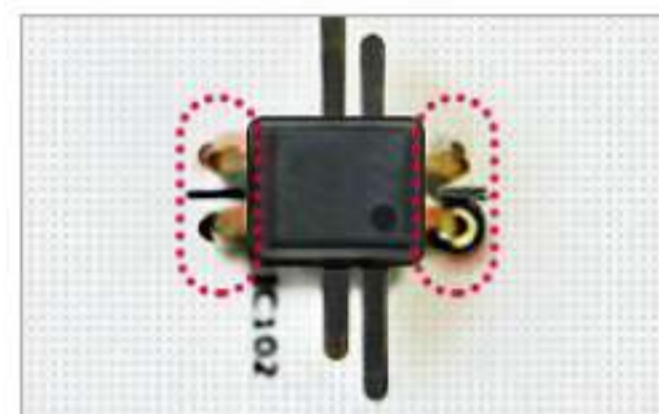


Without circuit protection coating



When applying circuit protection coating

Product Characteristics



1.8 mm

the interval between bezel and bezel

Offered in B to B 1.8mm super ultra-slim bezel, approximately 49% less than the previous 55 LV77A.



Use in a variety of locations

It is used for various purposes in the retail, Cosmetics and fashion industries as well as in the control centers of broadcasting and military units.



Slim

Light, slimmed display

Light weight and slim thickness not only provide luxurious interior effects at the workplace, but also provide convenient installation and maintenance.

Software Description

- Provides Sync control software for content without multimedia players or PCs
- Built-in Sync Playback functionality enables multiple content sync to be changed

Specification

AVA-49VM5E-A (1.8mm) / Procurement Identification Number : 23678342

| | | | | |
|------------------------|-------------------------|--|-----------------------|----------------------------|
| Panel | screen size | 123 cm | Panel Type | IPS |
| | Aspect Ratio | 16:9 | Resolution | 1,920 x 1,080 (FHD) |
| | Brightness | 500 cd/m ² | Contrast Ratio | 1,300 : 1 |
| | dynamic intensity ratio | 500,000 : 1 | viewing angle (H x V) | 178 x 178 |
| | Response speed | 8ms (G to G) | surface treatment | Haze 3% |
| | the fatal thread(Typ.) | 60,000 Hours | Operation Time | 24Hours / 7Days |
| | Supporting Modes | Supports horizontal and vertical modes | | |
| Connection | Input | HDMI (2), DP, DVI - D, Audio, USB 2.0 | Output | DP, Audio |
| | external control | RS232C In/out, RJ45(LAN) In/out, IR In | | |
| Product specifications | bezel color | Black | bezel size | 0.9 mm (Even), BtoB 1.8 mm |
| | Dimension | 1,075.7 x 605.8 x 86.2 mm | Weight (Head) | 17.5 kg |
| | VESA™ standard mount | 600 x 400 mm | | |

AVA-55LV75D-B (3.5mm) / Procurement Identification Number : 23678343

| | | | | |
|------------------------|-----------------------|---|------------------------|---|
| Panel | screen size | 138 cm | Panel Type | IPS |
| | Aspect Ratio | 16 : 9 | Resolution | 1,920 x 1,080 (FHD) |
| | Brightness | 500 cd/m ² | Viewing angle (H x V) | 178 x 178 |
| | Surface treatment | Hard-coating (3H), Anti-glare treatment of front polarizing plates (Haze 10%) | The fatal thread(Typ.) | 60,000 Hours |
| | Operation Time | 24Hours / 7Days | Supporting Modes | Supports horizontal and vertical modes |
| Connection | Input | HDMI, DVI-D, RGB, USB, DP, Audio | Output | DP, Audio |
| | External control | RS232C In/out, RJ45 In, IR Receiver In | | |
| Product specifications | Bezel color | Black | Bezel size | 2.25 mm (Top/Left) / 1.25 mm (a low/right), BtoB 3.5 mm |
| | Dimension (W x H x D) | 1,213.4 x 684.2 x 88.5 mm | Weight (Head) | 23 kg |
| | VESA™ standard mount | 600 x 400 mm | | |

AVA-55VM5E-A (1.8mm) / Procurement Identification Number : 23678345

| | | | | |
|------------------------|-------------------------|--|-----------------------|----------------------------|
| Panel | Screen size | 138 cm | Panel Type | IPS |
| | Aspect Ratio | 16 : 9 | Resolution | 1,920 x 1,080 (FHD) |
| | Brightness | 500 cd/m ² | Contrast Ratio | 1,400 : 1 |
| | Dynamic intensity ratio | 500,000 : 1 | Viewing angle (H x V) | 178 x 178 |
| | Response speed | 8ms (G to G) | Surface treatment | Haze 3% |
| | he fatal thread(Typ.) | 60,000 Hours | Operation Time | 24Hours / 7Days |
| | Supporting Modes | Supports horizontal and vertical modes | | |
| Connection | Input | HDMI (2), DP, DVI-D, Audio, USB 2.0 | Output | DP, Audio |
| | External control | RS232C In/out, RJ45(LAN) In/out, IR In | | |
| Product specifications | Bezel color | Black | VezeL size | 0.9 mm (Even), BtoB 1.8 mm |
| | Dimension (W x H x D) | 1,211.4 x 682.2 x 86.5 mm | Weight (Head) | 18.6 kg |
| | VESA™ standard mount | 600 x 400 mm | | |